

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Drink Rails

DI-DR24, DI-DR30, DI-DR36



DI-DR30  
Top View



DI-DR30  
Front View



**Intertek**

4004503

Conforms to ANSI/NSF STD 2

### Standard Features

- All stainless steel construction
- Available in 24", 30", or 36" lengths
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Cut-out Dimensions


- Model DI-DR24 - 4-1/4" by 23-1/4"
- Model DI-DR30 - 4-1/4" by 29-1/4"
- Model DI-DR36 - 4-1/4" by 35-1/4"

#### Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan


To view cleaning and care instructions, please visit:  
[https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

### Dimensional Information




PLAN VIEW

X = Left to right dimension is 24", 30", or 36"



FRONT VIEW



SIDE ELEVATION

<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780          989.752.4275 • 800.748.0423 • Fax 989.752.4444  <a href="http://www.glastender.com">www.glastender.com</a></p>	<p>Approval/Notes:</p>
--	------------------------

Specifications subject to change without notice. For current specifications please visit our website.

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Mixology Drink Rails

DI-MDR24, DI-MDR30, DI-MDR36

### Standard Features

- Stainless steel top and interior liner
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner and acts as thermal barrier to prevent heat transfer
- One-piece top includes drain pan with removable perforated insert
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Stainless steel exterior wrap
- 4" deep well liner is 3-5/8" front-to-back
- Designed to hold up to 3-1/2" wide bottles or 1/9th pans
- Installation kit includes: 10' of clear vinyl drain tube, seven - 4" Ty-wraps, one - 1/2" PVC tee, one - 1/2" nylon elbow, and two drainline splicers
- Install by making a notched cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Liner

- 4" deep and 3-3/4" front-to-back

#### Cut-out Dimensions

The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension as listed below:

- Model DI-MDR24 - 10" by 22-1/4"
- Model DI-MDR30 - 10" by 28-1/4"
- Model DI-MDR36 - 10" by 34-1/4"

#### Materials

- 22 gauge galvanized steel parts include: exterior wrap and bottom
- 20 gauge stainless steel parts include: interior liner and perforated insert
- 18 gauge stainless steel parts include: top and drain pan



DI-MDR30  
Top view



DI-MDR30  
Side view



Intertek

4004503

Conforms to ANSI/NSF STD 2



DI-MDR30

Shown installed and dressed  
(1/9th pans and bottles not included)


To view cleaning and care instructions, please visit:  
[https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com</p>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	


# Drop-In Mixology Drink Rails

## Dimensional Information


**X = Left-to-right dimension is 24", 30", or 36"**

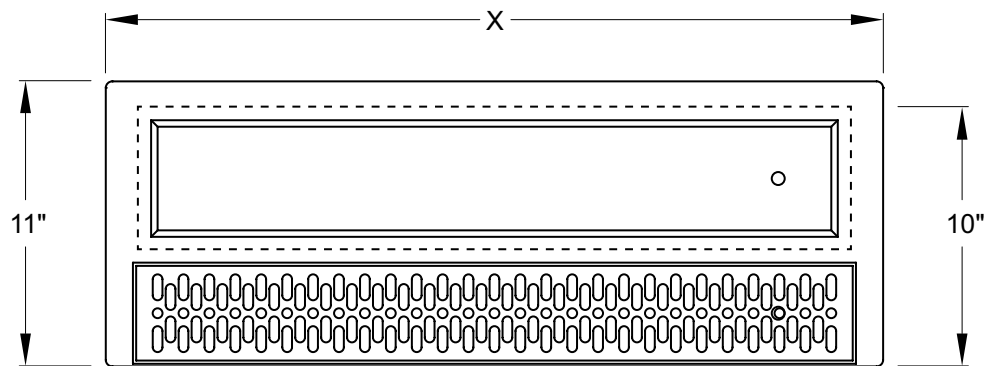

PLAN VIEW

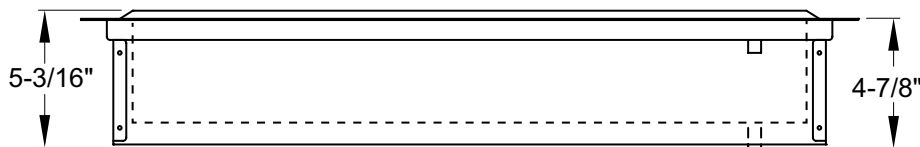

FRONT VIEW




SHOWN WITH DRAIN TUBE CONNECTED

SIDE ELEVATION

## Cut-Out Details

The unit includes a flange along the back and sides and is designed to install into a notch cut-out in the bar top. If you desire the front of the drain pan to be flush with the bar top, then a 10" deep notch is required with the left-to-right dimension being 1-3/4" less than the outer flange dimension.

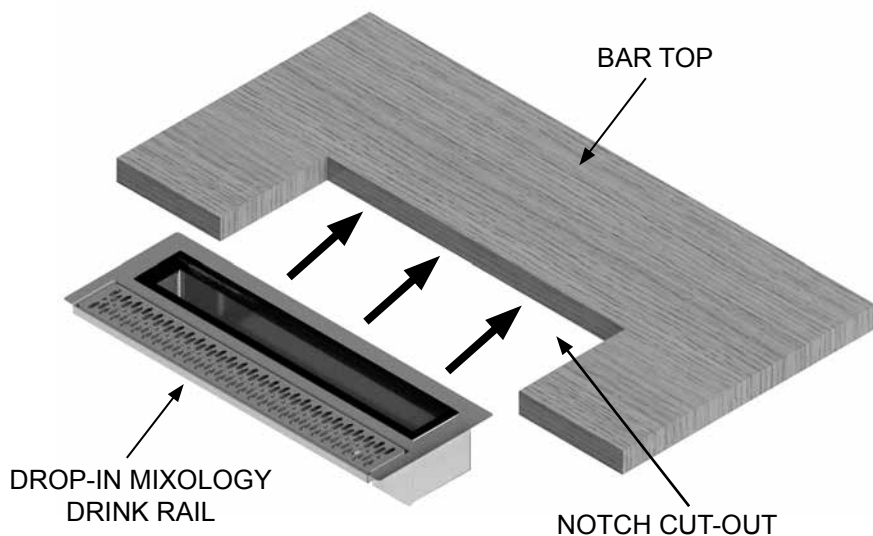


MODEL	X WIDTH =	LEFT-TO-RIGHT CUTOUT
DI-MDR24	24"	22-1/4"
DI-MDR30	30"	28-1/4"
DI-MDR36	36"	34-1/4"

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Mixology Wells

DI-MW24, DI-MW30, DI-MW36

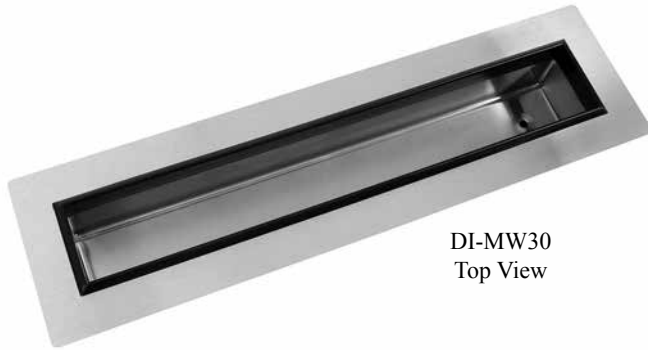

DI-MW30  
Top View



DI-MW30  
Front View



**Intertek**  
4004503  
Conforms to ANSI/NSF STD 2



DI-MW30  
Shown dressed  
(1/9th pans and bottles not included)

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Liner

- 4" deep and 3-3/4" front-to-back

#### Cut-out Dimensions

- Model DI-MW24 - 6-1/2" by 22-1/2"
- Model DI-MW30 - 6-1/2" by 28-1/2"
- Model DI-MW36 - 6-1/2" by 34-1/2"

#### Materials

- 22 gauge galvanized steel parts include: exterior wrap and bottom
- 20 gauge stainless steel parts include: interior liner
- 18 gauge stainless steel parts include: top


To view cleaning and care instructions, please visit:  
[https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

### Standard Features

- Stainless steel top and interior liner
- PVC plastic breaker strip around well liner: creates 5/16" raised edge around liner and acts as thermal barrier to prevent heat transfer
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Stainless steel exterior wrap
- 4" deep well liner is 3-5/8" front-to-back
- Designed to hold up to 3-1/2" wide bottles or 1/9th pans
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, one - 1/2" PVC elbow, one - 1/2" nylon elbow, and one drainline splicer
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

### Dimensional Information

X = Left to right dimension is 24", 30", or 36"

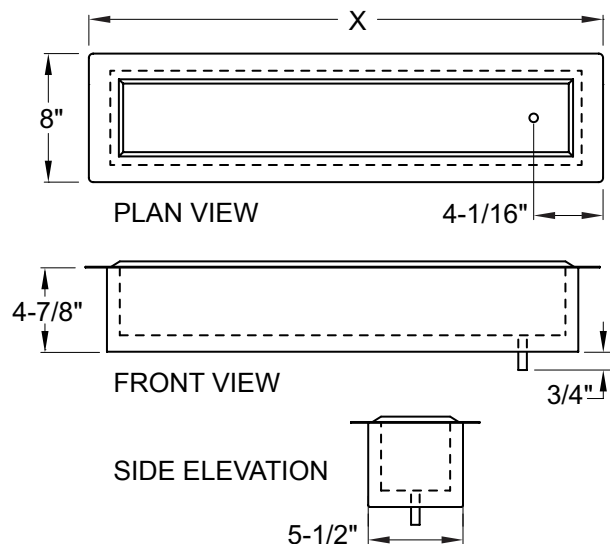

**Glastender, Inc.** • 5400 N Michigan Rd • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
www.glastender.com

Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.




Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Rinser Faucet

DI-RF7, DI-RF12, DI-RF18, DI-RF24



### Dimensional Information

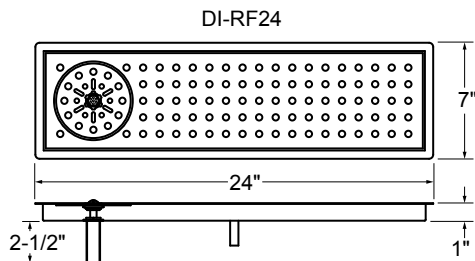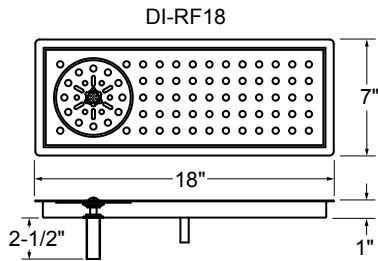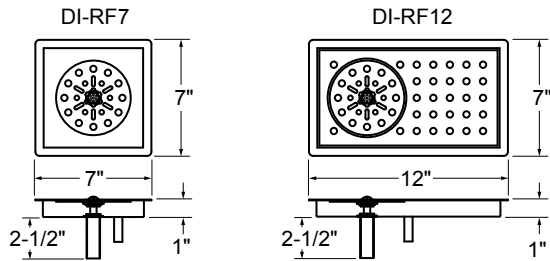

To view cleaning and care instructions, please visit:  
[http://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](http://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

### Standard Features

- All stainless steel construction
- Pan includes radius interior corners for easy cleaning
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Apply silicone sealant to underside of flange. Set in place and finish plumbing the unit.

### Installation Notes

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
- Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).

### Specifications

#### Drains

- 1/2" welded tailpiece

#### Cut-out Dimensions


- Model DI-RF7 - 6-1/4" by 6-1/4"
- Model DI-RF12 - 6-1/4" by 11-1/4"
- Model DI-RF18 - 6-1/4" by 17-1/4"
- Model DI-RF24 - 6-1/4" by 23-1/4"

#### Materials

- All stainless steel

#### Faucet


- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included

<p>03012383 Rinser Faucet Assembly</p>	 <p><b>Intertek</b> 4004503 Conforms to NSF/ANSI STD 372</p>
--	--

<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780          989.752.4275 • 800.748.0423 • Fax 989.752.4444  <a href="http://www.glastender.com">www.glastender.com</a></p>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Drain Pans

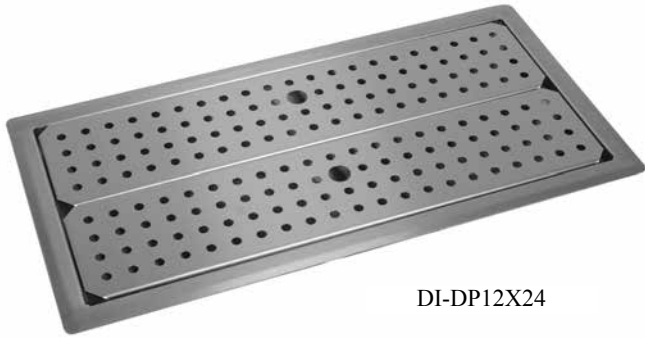

DI-DP12X24

Model Number Key

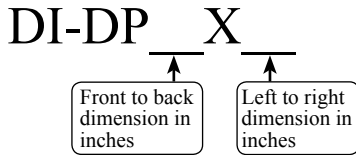

- DI-DP12X24, DI-DP12X30, DI-DP12X36,  
 DI-DP12X42, DI-DP12X48,  
 DI-DP18X24, DI-DP18X30, DI-DP18X36,  
 DI-DP18X42, DI-DP18X48

### Standard Features

- All stainless steel construction
- 18 gauge stainless steel pan with removable perforated inserts
- Available in standard widths of 12" or 18" and lengths from 24" to 48". Custom sizes also available
- Drain consists of 1/2" tailpiece that exits from the bottom of the unit
- Drain pan flange includes self-rimming edge for tight fit to work surface
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2" stainless steel sheet metal screws, three #10 x 1/2" black sheet metal screws, three cable clamps, two 1/2" x 1/2" plastic elbows
- Install by making cut-out in work surface (see details below), apply silicone sealant to underside of drain pan flange, set in place and plumb drain line.

To view cleaning and care instructions, please visit: [https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

Dimensional Information	Cut-Out Details
<p>X = Left to right dimension from 24" to 48", in 6" increments                      Y = Front to back dimension of 12" or 18"</p> <p style="text-align: center;">PLAN VIEW</p> <p style="text-align: center;">SIDE ELEVATION (not to scale)</p>	<p>Make cut-out 1-3/4" smaller than the outer flange dimensions. This will leave approximately 1/8" gap between edge of cut-out and the drain pan sides for a snug fit.</p> <p style="text-align: center; font-weight: bold;">CUT-OUT</p> <p>EXAMPLE: A DI-DP12X24 which measures 12" x 24" would require a cut-out size of 10-1/4" x 22-1/4"</p>

<p><b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780                  989.752.4275 • 800.748.0423 • Fax 989.752.4444  <a href="http://www.glastender.com">www.glastender.com</a></p>	<p>Approval/Notes:</p>
<p>Specifications subject to change without notice. For current specifications please visit our website.</p>	